

# **TRUCK TIRES TECHNICAL CATALOGUE**

2025 LINGLONG TIRE



catalogue



Web



## **LINGLONG AMERICAS, INC.**

Add: 1484 Medina Road, Suite 118 Medina OH 44256

E-mail: [linglong\\_sales@linglong.cn](mailto:linglong_sales@linglong.cn)

<https://en.linglong.cn/>

2025



# COMPANY INTRODUCTION



# LINGLONG

LRT71

LRT71

LRA71

Shandong Linglong Tyre Co., Ltd. is a technical tire manufacturer integrating tire design, development, manufacturing and sales.

Founded in 1975, the company has seven R&D centers, seven manufacturing bases across the world currently and over 17,783 employees, with its products widely used on passenger vehicles, commercial vehicles, and engineering machinery vehicles. It has built diversified brand system for different markets.

In the future, the company will fully implement its global layout, fully improve its core competitiveness, and strive to achieve its annual production and sales volume reaching 160 million units, sales revenue of over RMB 80 billion and production capacity among global top five tire manufacturers by 2030, becoming a technology-oriented enterprise with world-class technology, management and brand influence.

[en.linglong.cn](http://en.linglong.cn)

# BRAND VALUE

It strengthens the retail network construction, with nearly

# 200,000

marketing outlets globally, promoting its brand reputation and customer loyalty through reliable product quality and excellent service.

The company's products are exported to 173 countries across the world, covering Europe, Middle East, Americas, Asia Pacific, and Africa, and provides OE service for over 100 manufacturing bases of 60 global well-known automakers.

Linglong's brand value reached

# 98.137

Billion RMB in 2024.

Linglong has sponsored over

# 100

sports events and teams worldwide

## Abundant sports marketing sponsorship

such as Real Madrid CF and Chelsea FC, to enhance its brand awareness and influence.



# GLOBAL LAYOUT

Linglong collects global extraordinary wisdom to demonstrate intelligent Linglong with technological innovation. The company has established R&D institutions in Germany, America, Beijing, Shanghai, Jinan, Yantai and Zhaoyuan, owning national enterprise design center, national recognized testing laboratory and national industrial design center, to form global integrative R&D pattern.



  
R&D Center in America

  
R&D Center in Germany

Serbia

  
Linglong International Europe d.o.o.Zrenjanin

## R&D Center

- R&D Center in Zhaoyuan and Yantai
- R&D Center in Beijing
- R&D Center in Shanghai
- R&D Center in Jinan

## Linglong Tyre Co.,Ltd.


- Jilin Linglong Tyre Co.,Ltd.
- Shandong Linglong Tyre Co.,Ltd.
- Dezhou Linglong Tyre Co.,Ltd.
- Shaanxi Linglong Tyre Co., Ltd.
- Hubei Linglong Tyre Co.,Ltd.
- Guangxi Linglong Tyre Co.,Ltd.
- Anhui Linglong Tyre Co.,Ltd.

  
Linglong International Tyre(Thailand)Co.,Ltd

## 7+5 STRATEGIC GLOBAL POSITIONING

In June 2021, Linglong plans to change its 6+6 global layout into 7+5 global layout to build seven Chinese manufacturing bases as well as five overseas manufacturing bases. At present, the company has five Chinese manufacturing bases in Zhaoyuan, Dezhou, Liuzhou, Jingmen, Changchun and two overseas manufacturing bases in Thailand and Serbia. Meanwhile, Linglong will carry out active inspection of its new factory's location, aiming at completing the full completion of 7+5 global layout, and fully utilizing global resources and expanding its global tire market.

# SOCT--STRESS OPTIMIZATION CONTROL TECHNOLOGY

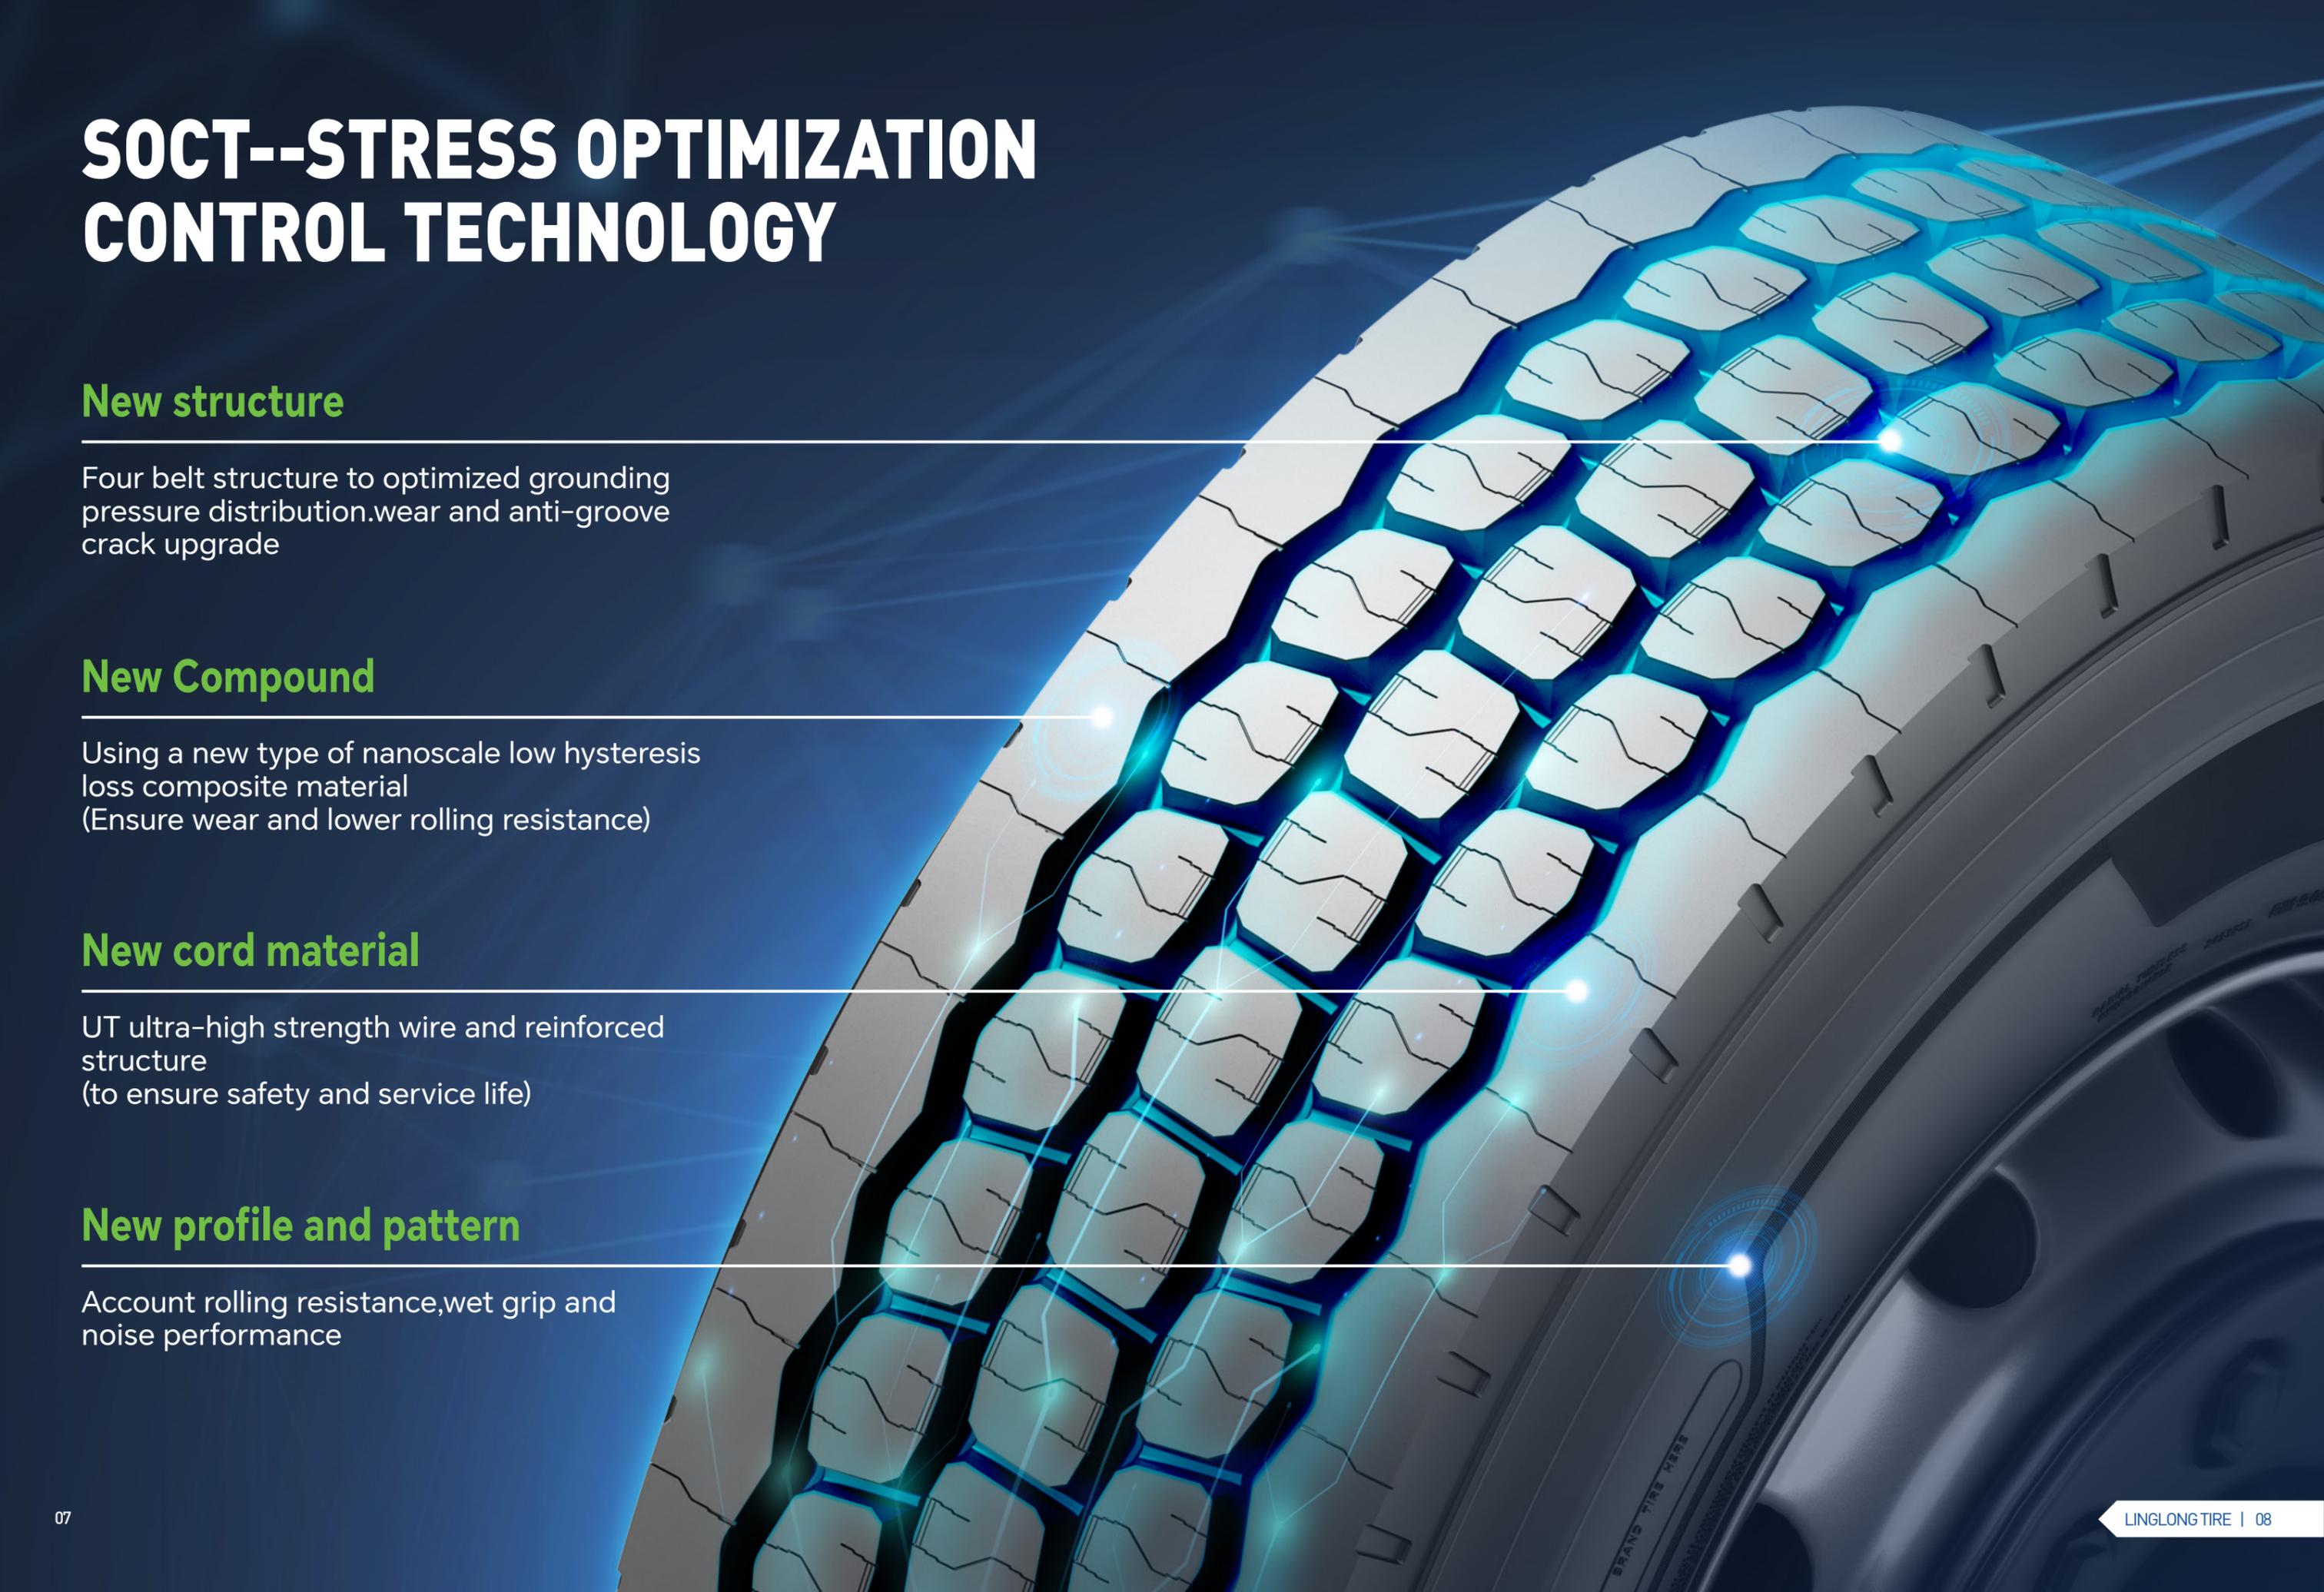

## New structure

Four belt structure to optimized grounding pressure distribution.wear and anti-groove crack upgrade

## New Compound

Using a new type of nanoscale low hysteresis loss composite material (Ensure wear and lower rolling resistance)

## New cord material

UT ultra-high strength wire and reinforced structure (to ensure safety and service life)

## New profile and pattern

Account rolling resistance,wet grip and noise performance

LINGLONG TIRE

LINGLONG TIRE



LLD71

LLT71



# LONG HAUL

LONG HAUL


REGIONAL

ON&OFF ROAD

COACH&URBAN

WINTER

# LLD71

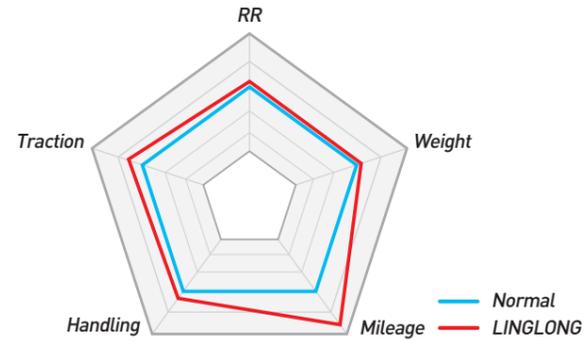


RADIAL TRUCK TIRE

ORIGIN: THAILAND

## SELLING POINTS OF TIRE PRODUCTS

- 1 Closed shoulder promoted uniform wear and improved rolling resistance.
- 2 Z-Zag groove provides good traction performance.
- 3 Aggressive center lugs help to improve traction in wet or dry conditions for the life of the tread.
- 4 Meet Smartway Verified standard.

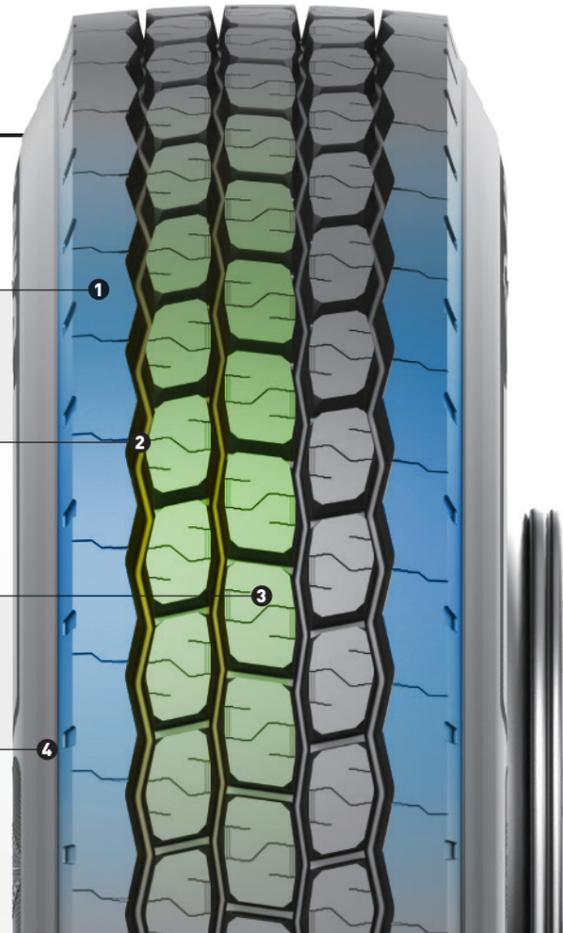

DRIVE



Size	Load index & Speed symbols	PR	Load Index	Max load and max air (lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread depth (In 32nds)
				Dual		Single				
				lbs	psi	lbs	psi			
295/75R22.5	146/143L	16	H	6005	120	6610	120	40.24	11.54	26
11R22.5	146/143L	16	H	6005	120	6610	120	41.53	11.06	26
11R24.5	149/146L	16	H	6610	120	7160	120	43.5	11.06	26

LONG HAUL

REGIONAL


ON&OFF ROAD

COACH&URBAN

WINTER



# LLT71

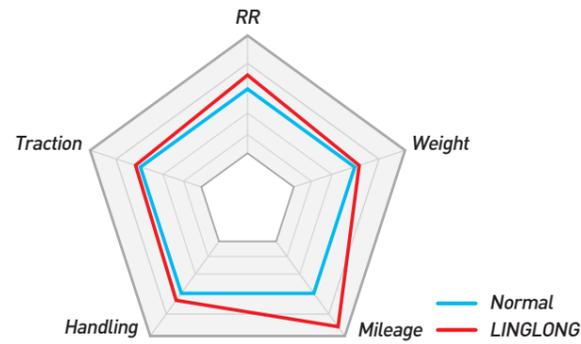


RADIAL TRUCK TIRE

ORIGIN: THAILAND

## SELLING POINTS OF TIRE PRODUCTS

- 1 Closed shoulder promoted uniform wear and improved rolling resistance.
- 2 Micro sipes on groove edges resists abnormal or "river wear".
- 3 Decoupling groove helps resist uneven shoulder wear.
- 4 Meet Smartway Verified standard.

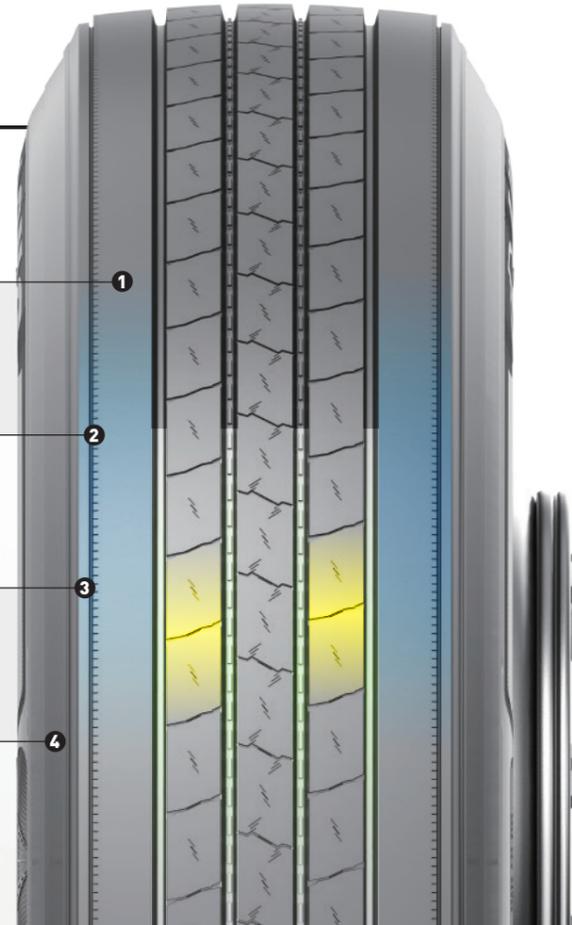

TRAILER



Size	Load index & Speed symbols	PR	Load Index	Max load and max air (lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread depth (In 32nds)
				Dual		Single				
				lbs	psi	lbs	psi			
295/75R22.5	146/143L	16	H	6005	120	6610	120	39.41	11.42	12
11R22.5	146/143L	16	H	6005	120	6610	120	40.94	11.1	12
11R24.5	149/146L	16	H	6610	120	7160	120	42.91	11.1	12

LONG HAUL

REGIONAL

ON&OFF ROAD

COACH&URBAN

WINTER



# KTD10



- Low rolling resistance reduces fuel consumption.
- Closed shoulder to fight irregular wear.
- New pattern design improves mileage for long-distance transportation.



SUITABLE FOR DRIVE AXLE OF TRUCKS.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
11R22.5	14	144/142	L	8.25	5840	105	6175	105	41.93	10.98	30.0	TRA
11R22.5	16	146/143	L	8.25	6005	120	6610	120	41.93	10.98	30.0	TRA
11R24.5	14	146/143	L	8.25	6005	105	6610	105	43.94	10.98	30.0	TRA
11R24.5	16	149/146	L	8.25	6610	120	7160	120	43.94	10.98	30.0	TRA
295/75R22.5	14	144/141	L	9.00	5675	110	6175	110	40.39	11.73	28.0	TRA
295/75R22.5	16	146/143	L	9.00	6005	120	6610	120	40.39	11.73	28.0	TRA
285/75R24.5	14	144/141	L	8.25	5675	110	6175	110	41.81	11.14	28.0	TRA
285/75R24.5	16	147/144	L	8.25	6175	120	6780	120	41.81	11.14	28.0	TRA

# LDE892



- Good braking and grip on wet road.
- Long life, low rolling resistance.
- Optimize the footprint for even wear and long tread life.
- Strong carcass materials.
- Help to promote tire durability and provide tire retreadability.



SUITABLE FOR DRIVE AXLE OF TRUCKS.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
11R22.5	14	144/142	L	8.25	5840	105	6175	105	41.93	10.98	27.7	TRA
11R22.5	16	146/143	L	8.25	6005	120	6610	120	41.93	10.98	27.7	TRA
11R24.5	14	146/143	L	8.25	6005	105	6610	105	43.94	10.98	27.7	TRA
11R24.5	16	149/146	L	8.25	6610	120	7160	120	43.94	10.98	27.7	TRA
295/75R22.5	14	144/141	L	9.00	5675	110	6175	110	40.39	11.73	27.7	TRA
295/75R22.5	16	146/143	L	9.00	6005	120	6610	120	40.39	11.73	27.7	TRA
285/75R24.5	14	144/141	L	8.25	5675	110	6175	110	41.81	11.14	27.7	TRA
285/75R24.5	16	147/144	L	8.25	6175	120	6780	120	41.81	11.14	27.7	TRA

# LLF16



- Good handling.
- Long life.



SUITABLE FOR STEER AXLE OF TRUCKS.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.50	10.98	18.3	TRA
11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	18.3	TRA
11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.46	10.98	18.3	TRA
11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.46	10.98	18.3	TRA
295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	39.92	11.73	18.3	TRA
295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	39.92	11.73	18.3	TRA
285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.34	11.14	18.3	TRA
285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.34	11.14	18.3	TRA

# LLF16e+



- Good handling.
- Low fuel consumption.
- Certified by U.S.A SmartWay.



SUITABLE FOR STEER AXLE OF TRUCKS.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
★ 11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.50	10.98	18.3	TRA
★ 11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	18.3	TRA
★ 11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.46	10.98	18.3	TRA
★ 11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.46	10.98	18.3	TRA
★ 295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	39.92	11.73	18.3	TRA
★ 295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	39.92	11.73	18.3	TRA
★ 285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.34	11.14	18.3	TRA
★ 285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.34	11.14	18.3	TRA



LONG HAUL

REGIONAL

ON&OFF ROAD

COACH&URBAN

WINTER

# LONG HAUL

## LLD37



- Good braking and grip on wet road.
- Long life.

### SUITABLE FOR DRIVE AXLE OF TRUCKS.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.93	10.98	27.7	TRA
11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.93	10.98	27.7	TRA
11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.94	10.98	27.7	TRA
11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.94	10.98	27.7	TRA
295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	40.39	11.73	27.7	TRA
295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	40.39	11.73	27.7	TRA
285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.81	11.14	27.7	TRA
285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.81	11.14	27.7	TRA

## LLD37e+



- Good braking and grip on wet road.
- Long life.
- Low fuel consumption.
- Certified by U.S.A SmartWay.

### SUITABLE FOR DRIVE AXLE OF TRUCKS.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.93	10.98	22.0	TRA
11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.93	10.98	22.0	TRA
11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.94	10.98	27.7	TRA
11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.94	10.98	27.7	TRA
295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	40.39	11.73	27.7	TRA
295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	40.39	11.73	27.7	TRA
285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.81	11.14	27.7	TRA
285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.81	11.14	27.7	TRA



# LONG HAUL

## LTE821



- Excellent straight running performance.
- Sipes in shoulder offer low noise and good heat dissipation.
- Low fuel consumption.

### SUITABLE FOR TRAILER AXLE OF TRUCKS.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
★ 11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.50	10.98	12.0	TRA
★ 11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	12.0	TRA
★ 11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.46	10.98	12.0	TRA
★ 11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.46	10.98	12.0	TRA
★ 295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	39.92	11.73	12.6	TRA
★ 295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	39.92	11.73	12.6	TRA
★ 285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.34	11.14	12.0	TRA
★ 285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.34	11.14	12.0	TRA



## T810



### SUITABLE FOR TRAILER AXLE OF TRUCKS.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.50	10.98	13.5	TRA
11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	13.5	TRA
11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.46	10.98	13.5	TRA
11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.46	10.98	13.5	TRA
295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	39.92	11.73	13.5	TRA
295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	39.92	11.73	13.5	TRA
285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.34	11.14	13.5	TRA
285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.34	11.14	13.5	TRA
255/70R22.5	16	140/137	M	7.50	5070	120	5510	120	36.61	10.04	13.5	TRA

LONG HAUL

REGIONAL

ON&OFF ROAD

COACH&URBAN

WINTER

# LONG HAUL

## T810e+



- Low fuel consumption.
- Certified by U.S.A SmartWay.



### SUITABLE FOR TRAILER AXLE OF TRUCKS.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
★ 11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.50	10.98	12.6	TRA
★ 11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	12.6	TRA
★ 11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.46	10.98	13.5	TRA
★ 11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.46	10.98	13.5	TRA
★ 295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	39.92	11.73	12.6	TRA
★ 295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	39.92	11.73	12.6	TRA



## LDL817



- Typical block pattern design makes good towing and grip on wet and dry road.
- Low fuel consumption.
- Wear-resistance compound reduces shifting to prevent uneven wear.



### SUITABLE FOR DRIVE AXLE OF TRUCKS.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
★ 445/50R22.5	18	158	L	14.00	---	---	9370	110	40.08	17.52	25.2	TRA
★ 445/50R22.5	20	161	L	14.00	---	---	10200	120	40.08	17.52	25.2	TRA
★ 445/50R22.5	18	155	L	14.00	---	---	8540	102	40.08	17.52	25.2	ETRTO
★ 445/50R22.5	20	161	L	14.00	---	---	10200	123	40.08	17.52	25.2	ETRTO



# LONG HAUL

## LTL811



- Low fuel consumption.
- Wear-resistance compound reduces shifting to prevent uneven wear.



### SUITABLE FOR TRAILER AXLE OF TRUCKS.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
★ 445/50R22.5	18	158	L	14.00	---	---	9370	110	40.08	17.52	13.2	TRA
★ 445/50R22.5	20	161	L	14.00	---	---	10200	120	40.08	17.52	13.2	TRA
★ 445/50R22.5	18	155	L	14.00	---	---	8540	102	40.08	17.52	13.2	ETRTO
★ 445/50R22.5	20	161	L	14.00	---	---	10200	123	40.08	17.52	13.2	ETRTO



## LLD76



- Good braking and grip on wet road.
- Construction optimized for long service life.



### SUITABLE FOR DRIVE AXLE OF TRUCKS.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.65	10.98	25.2	TRA
11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.65	10.98	25.2	TRA
11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.66	10.98	25.2	TRA
11R24.5	16	149/146	M	8.25	6610	120	7610	120	43.66	10.98	25.2	TRA

LONG HAUL  
REGIONAL  
ON&OFF ROAD  
COACH&URBAN  
WINTER

LINGLONG TIRE

LONG HAUL

REGIONAL

ON&OFF ROAD

COACH&URBAN

WINTER

LRD71


LRT71

LRA71

LRA72<sub>s</sub>

# REGIONAL

# LRD71

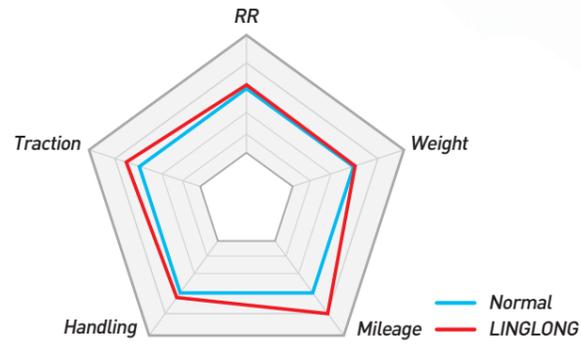

RADIAL TRUCK TIRE

ORIGIN: THAILAND

## SELLING POINTS OF TIRE PRODUCTS

- 1 Open shoulder offers good traction and help with heat dissipation.
- 2 Aggressive pattern and lateral grooves provides tire excellent drive and braking performance.
- 3 Two main grooves helps to provide good handling performance.



IMMOBILIZE



TRACTIVE FORCE

DRIVE



Size	Load index & Speed symbols	PR	Load Range	Max load and Max Air (lbs & psi)				Overall Diameter in inches	Section Width in inches	Tread Depth (in 32nds)
				Dual		Single				
				lbs	psi	lbs	psi			
295/75R22.5	146/143L	16	H	6005	120	6610	120	40.50	11.54	30
11R22.5	146/143L	16	H	6005	120	6610	120	41.78	11.06	30
11R24.5	149/146L	16	H	6610	120	7160	120	43.75	11.06	30

LONG HAUL

REGIONAL


ON&OFF ROAD

COACH&URBAN

WINTER



# LRT71

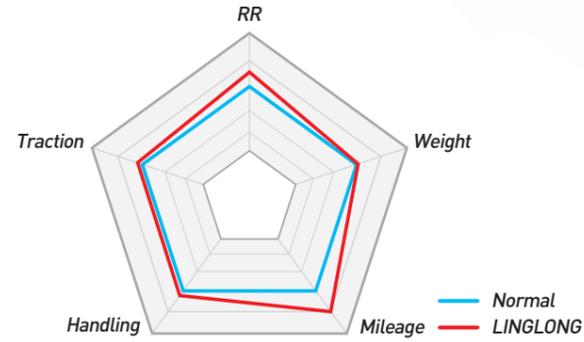


RADIAL TRUCK TIRE

ORIGIN: THAILAND

## SELLING POINTS OF TIRE PRODUCTS

- 1 Wide, continuous shoulder ribs fight turning side forces and resist tearing.
- 2 Micro sipes on groove edges resists abnormal or "river wear".
- 3 Deep tread depth for high-Scrub trailer service.

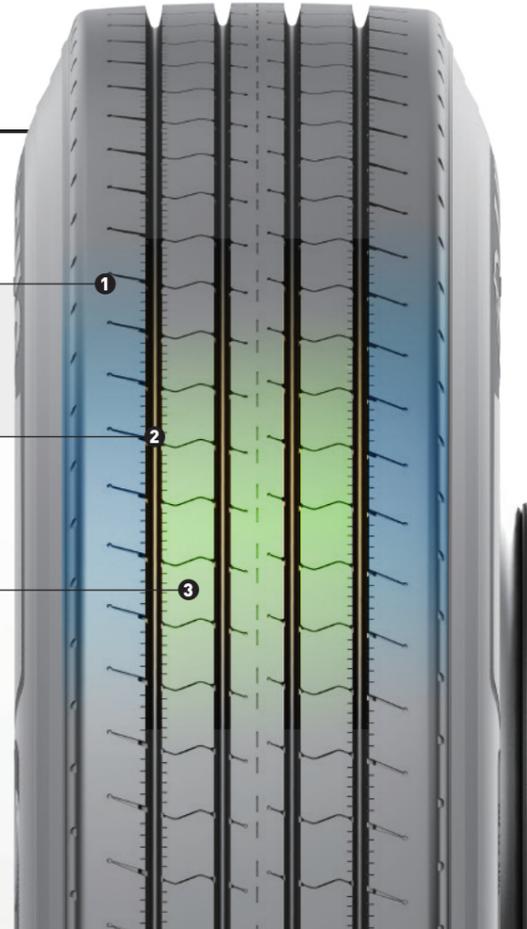

RESISTANCE



WEAR-RESISTANT

TRAILER



Size	Load index & Speed symbols	PR	Load Range	Max load and Max Air (lbs & psi)				Overall Diameter in inches	Section Width in inches	Tread Depth (in 32nds)
				Dual		Single				
				lbs	psi	lbs	psi			
295/75R22.5	146/143L	16	H	6005	120	6610	120	39.72	11.42	17
11R22.5	146/143L	16	H	6005	120	6610	120	41.26	11.1	17
11R24.5	149/146L	16	H	6610	120	7160	120	43.23	11.1	17

LONG HAUL

REGIONAL

ON&OFF ROAD

COACH&URBAN

WINTER



# LRA71



RESISTANCE



GOOD HANDLING

ALL POSITION



LONG HAUL


REGIONAL

SPECIAL TRAILER

MIXED SERVICE

COACH&URBAN

WINTER

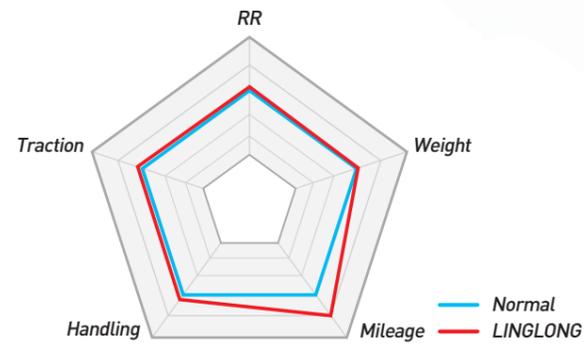


RADIAL TRUCK TIRE

ORIGIN: THAILAND

## SELLING POINTS OF TIRE PRODUCTS

- 1 A combination of 4 way and straight groove provide outstanding traction and drainage performance for a smoother ride and better handling.
- 2 Optimized rib distribution proportioned for added stiffness, which helps reduce irregular wear.
- 3 Tough tread compound and solid shoulder ribs to resist maneuvering scrub.

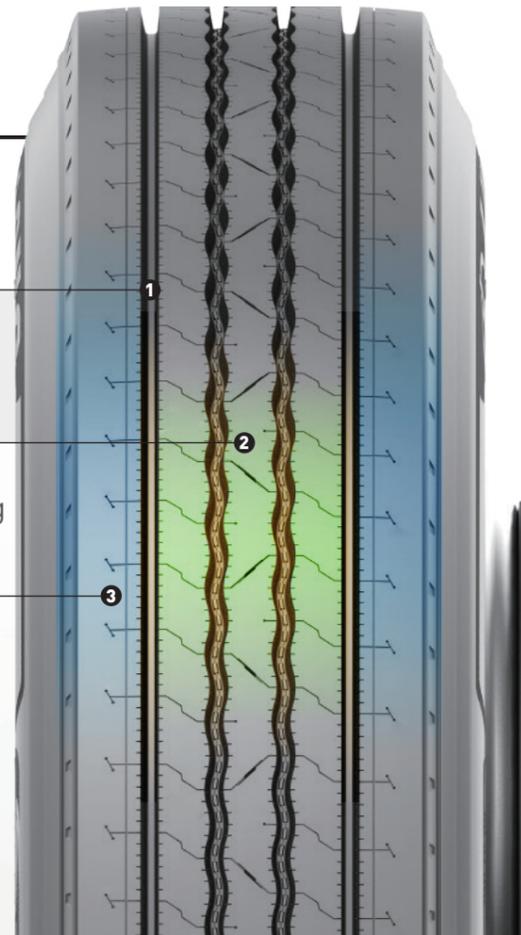


Size	Load index & Speed symbols	PR	Load Range	Max load and Max Air(lbs & psi)				Overall Diameter in inches	Section Width in inches	Tread Depth (in 32nds)
				Dual		Single				
				lbs	psi	lbs	psi			
295/75R22.5	146/143L	16	H	6005	120	6610	120	39.93	11.54	21
11R22.5	146/143L	16	H	6005	120	6610	120	41.21	11.06	21
11R24.5	149/146L	16	H	6610	120	7160	120	43.18	11.06	21
255/70R22.5	140/137M	16	H	5070	120	5510	120	36.55	10.16	17
*215/75R17.5	135/133J	16	H	4540	123	4805	123	30.24	8.35	16
225/70R19.5	128/126L	14	G	3750	110	3970	110	31.83	8.94	16
*235/75R17.5	143/141J	18	J	5675	127	6005	127	31.34	9.29	17
245/70R19.5	135/133L	16	H	4540	120	4805	120	32.95	9.61	17

\* Low profile trailer



# LRA72s

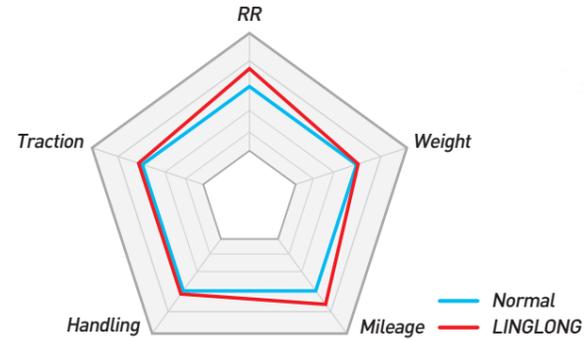


RADIAL TRUCK TIRE

ORIGIN: THAILAND

## SELLING POINTS OF TIRE PRODUCTS

- 1 A combination of 3 way grooves and lateral sipes on block provide outstanding traction and drainage performance in all weather conditions.
- 2 Deep tread depth of 20/32nds provides long tread life.
- 3 LRA72s meet 3 Peak Mountain Snow Flake (3PMSF) criteria for snow traction performance.
- 4 Sidewall protector ribs preserve casing durability by fighting curbing damage with thick ribs on both sidewalls.

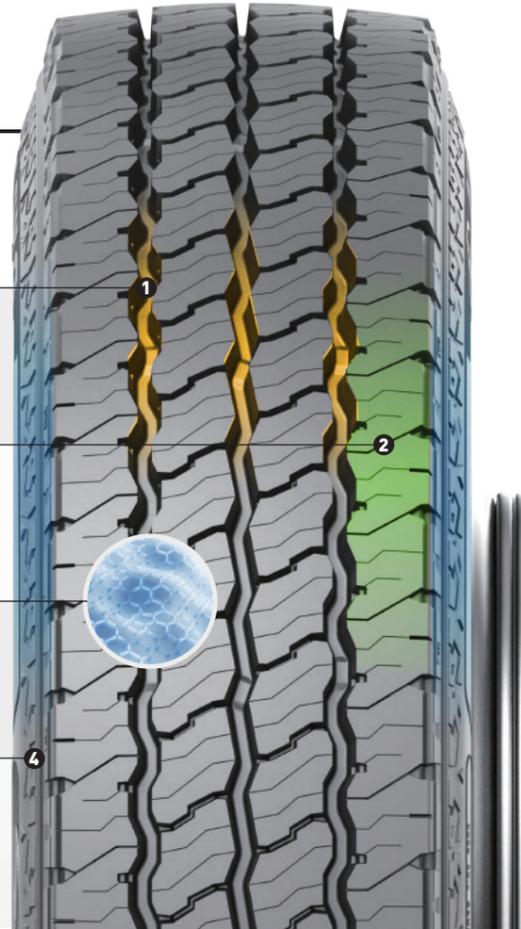

ALL POSITION



Size	Load index & Speed symbols	PR	Load Range	Max load and Max Air (lbs & psi)				Overall Diameter in inches	Section Width in inches	Tread Depth (in 32nds)
				Dual		Single				
				lbs	psi	lbs	psi			
225/70R19.5	128/126M	14	G	3750	110	3970	110	32.08	8.94	20
245/70R19.5	135/133M	16	H	4540	120	4805	120	33.14	9.61	20



LONG HAUL

REGIONAL

ON&OFF ROAD

COACH&URBAN

WINTER

# LTL863



- Typical combined pattern design offers optimal trailer performance.
- Low rolling resistance.
- Wear-resistance compound reduces shifting to prevent uneven wear.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
385/65R22.5	18	158	L	11.75	---	---	9370	123	42.20	15.31	20.8	ETRTO
385/65R22.5	20	160(158)	J(L)	11.75	---	---	9915	130	42.20	15.31	20.8	ETRTO
385/65R22.5	24	164	J	11.75	---	---	11000	130	42.20	15.31	20.8	ETRTO
385/65R22.5	24	164(158)	K(L)	11.75	---	---	11000	130	42.20	15.31	20.8	ETRTO
425/65R22.5	18	162	K	12.25	---	---	10470	110	44.25	16.61	22.0	TRA
425/65R22.5	20	165	K	12.25	---	---	11400	120	44.25	16.61	22.0	ETRTO
445/65R22.5	20	169	J	13.00	---	---	12800	130	45.28	17.48	22.7	ETRTO
385/55R22.5	18	158	L	12.25	---	---	9370	123	39.21	15.20	20.8	ETRTO
385/55R22.5	20	160(158)	J(L)	12.25	---	---	9915	130	39.21	15.20	20.8	ETRTO

# KTA20



- Wide and strong shoulder ribs increase tread life.
- Lasting grip and stability.
- High wear resistance.

SUITABLE FOR ALL POSITION OF TRUCKS USING FOR HIGH TRACTION AND HIGH SCRUB APPLICATIONS.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
11R22.5	14	144/142	L	8.25	5840	105	6175	105	41.50	10.98	19.0	TRA
11R22.5	16	146/143	L	8.25	6005	120	6610	120	41.50	10.98	19.0	TRA
11R24.5	14	146/143	L	8.25	6005	105	6610	105	43.46	10.98	19.0	TRA
11R24.5	16	149/146	L	8.25	6610	120	7160	120	43.46	10.98	19.0	TRA
295/75R22.5	14	144/141	L	9.00	5675	110	6175	110	39.92	11.73	19.0	TRA
295/75R22.5	16	146/143	L	9.00	6005	120	6610	120	39.92	11.73	19.0	TRA
285/75R24.5	14	144/141	L	8.25	5675	110	6175	110	41.34	11.14	19.0	TRA
285/75R24.5	16	147/144	L	8.25	6175	120	6780	120	41.34	11.14	19.0	TRA

SmartWay

# KTD23



- Horizontal pattern provides tire excellent drive and braking performance.
- Shoulder pattern groove and open pattern design with good tire heat dissipation.
- Pattern block stiffener effectively restrains grinding block root tear and decorative pattern.

SUITABLE FOR DRIVE AXLE OF TRUCKS USING FOR HIGH TRACTION AND HIGH SCRUB APPLICATIONS.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
215/75R17.5	16	135/133	L	6.00	4540	123	4805	123	30.20	8.31	18.9	ETRTO
225/70R19.5	12	125/123	L	6.75	3415	95	3640	95	31.93	8.90	19.9	TRA
225/70R19.5	14	128/126	L	6.75	3750	110	3970	110	31.93	8.90	19.9	TRA
245/70R19.5	14	133/131	L	7.50	4300	110	4540	110	33.03	9.76	19.9	TRA
245/70R19.5	16	135/133	L	7.50	4540	120	4805	120	33.03	9.76	19.9	TRA

# LLF86



SUITABLE FOR MEDIUM TRUCKS RUNNING ON THE HIGH-GRADE ROAD.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
215/75R17.5	14	126/124	L/M	6.00	3525	102	3750	102	30.02	8.31	15.7	ETRTO
215/75R17.5	16	135/133	J/L	6.00	4540	123	4805	123	30.02	8.31	15.7	ETRTO

# LLA78



SUITABLE FOR MEDIUM TRUCKS RUNNING ON THE HIGH-GRADE ROAD.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
245/70R17.5	18	143/141	J	7.50	5675	127	6005	127	31.06	12.0	15.1	ETRTO
235/75R17.5	14	132/130	L/M	6.75	4190	112	4400	112	31.38	13.0	16.4	ETRTO
235/75R17.5	16	141/140	J	6.75	5510	123	5675	123	31.38	13.0	16.4	ETRTO
235/75R17.5	18	143/141	J	6.75	5675	127	6005	127	31.38	13.0	16.4	ETRTO

# F816



- Special design for steer and trailer axle of trucks.
- Good side-wear resistance.
- High-speed performance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.50	10.98	18.3	TRA
11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	18.3	TRA
11R22.5	16	148/145	M	8.25	6390	123	6945	123	41.50	10.98	18.3	ETRTO
12R22.5	16	152/148	L	9.00	6945	123	7830	123	42.68	11.81	20.2	ETRTO
12R22.5	16	150/147	M	9.00	6780	120	7390	120	42.72	11.81	20.2	GB
12R22.5	18	152/149	L	9.00	7160	135	7830	135	42.72	11.81	20.2	GB
11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.46	10.98	18.3	TRA
11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.46	10.98	18.3	TRA
295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	39.92	11.73	18.3	TRA
295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	39.92	11.73	18.3	TRA
285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.34	11.14	18.3	TRA
285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.34	11.14	18.3	TRA

# F816e+



- Good handling.
- Low fuel consumption.
- Certified by U.S.A SmartWay.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
★ 11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.50	10.98	18.3	TRA
★ 11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	18.3	TRA
★ 11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.46	10.98	18.3	TRA
★ 11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.46	10.98	18.3	TRA
★ 295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	39.92	11.73	18.3	TRA
★ 295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	39.92	11.73	18.3	TRA
★ 285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.34	11.14	18.3	TRA
★ 285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.34	11.14	18.3	TRA



# LLF56+



SUITABLE FOR ALL POSITION AXLE OF BUSES AND TRUCKS.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
9R22.5	12	133/131	M	6.75	4300	105	4540	105	38.35	9.02	17.0	TRA
9R22.5	14	136/134	M	6.75	4675	120	4940	120	38.35	9.02	17.0	TRA
10R22.5	14	141/139	M	7.50	5355	115	5675	115	40.12	10.00	17.6	TRA
10R22.5	14	144/142	L	7.50	5840	123	6175	123	40.12	10.00	17.6	ETRTO
10R22.5	16	144/142	L	7.50	5840	130	6175	130	40.12	10.00	17.6	GB

# D955



- Recommended for regional and Pickup/Deliverty drive application.
- Tread pattern provides traction in all weather conditions.

SUITABLE FOR DRIVE AXLE OF TRUCKS RUNNING UNDER A WIDE RANGE OF USE, FROM HIGHWAY TO LIGHT UNPAVED ROAD

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
225/70R19.5	12	125/123	M	6.75	3415	95	3640	95	31.93	8.90	18.3	TRA
225/70R19.5	14	128/126	M	6.75	3750	110	3970	110	31.93	8.90	18.3	TRA
245/70R19.5	14	133/131	M	7.50	4300	110	4540	110	33.03	9.76	19.5	TRA
245/70R19.5	14	133/131	M	7.50	4300	109	4540	109	33.03	9.76	19.5	ETRTO
245/70R19.5	16	135/133	M	7.50	4540	120	4805	120	33.03	9.76	19.5	TRA
245/70R19.5	16	136/134	L	7.50	4675	120	4940	120	33.03	9.76	19.5	ETRTO

# LLA28



- Recommended for Regional application.
- Zig-zag groove tread design reduces stone retention.
- Tread pattern delivers lateral traction in all weather conditions.

SUITABLE FOR THE TRAILER AXLE OF THE TRUCKS RUNNING ON THE MULTI ROAD.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
425/65R22.5	18	162	K	12.25	---	---	10470	110	44.25	16.61	22.0	TRA
425/65R22.5	20	165	J/K	12.25	---	---	11400	120	44.25	16.61	22.0	ETRTO

# LLA18



- Recommended for regional applications.
- Zig-zag groove tread design reduces stone retention.

SUITABLE FOR THE TRAILER AXLE OF THE TRUCKS RUNNING ON THE HIGH-GRADE ROAD.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
385/65R22.5	18	158	K	11.75	---	---	9370	123	42.20	15.31	20.8	ETRTO
385/65R22.5	20	160	J	11.75	---	---	9915	130	42.20	15.31	20.8	ETRTO

# KTD301



- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
11R22.5	14	144/142	L	8.25	5840	105	6175	105	41.93	10.98	28.3	TRA
11R22.5	16	146/143	L	8.25	6005	120	6610	120	41.93	10.98	28.3	TRA
11R22.5	16	148/145	L	8.25	6390	123	6945	123	41.93	10.98	28.3	ETTRO
11R24.5	14	146/143	L	8.25	6005	105	6610	105	43.94	10.98	28.3	TRA
11R24.5	16	149/146	L	8.25	6610	120	7160	120	43.94	10.98	28.3	TRA



# LTL812



- Long life.
- Retreadability.
- Low eccentric wear.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
9R22.5	14	136/134	M	6.75	4675	120	4940	120	38.35	9.02	18.3	TRA
10R22.5	14	141/139	M	7.50	5355	115	5675	115	40.12	10.00	18.9	TRA
11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.50	10.98	20.2	TRA
11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	20.2	TRA
11R22.5	16	148/145	M	8.25	6390	123	6945	123	41.34	10.98	20.2	ETRTO
12R22.5	16	152/148	L	9.00	6945	123	7830	123	42.68	11.81	21.4	ETRTO
12R22.5	18	152/149	L	9.00	7160	135	7830	135	42.72	11.81	21.4	GB
295/80R22.5	16	152/148	M	9.00	6945	123	7830	123	41.10	11.73	21.4	ETRTO
295/80R22.5	18	152/149	L	9.00	7160	130	7830	130	41.10	11.73	21.4	GB
295/80R22.5	18	154/149	M	9.00	7160	123	8270	123	41.10	11.73	21.4	ETRTO
315/80R22.5	18	154/150	M	9.00	7390	120	8270	120	42.36	12.28	17.6	ETRTO
315/80R22.5	20	156/150	L	9.00	7390	123	8820	123	42.36	12.28	17.6	ETRTO
285/70R19.5	16	140/137	M	8.25	5070	105	5510	105	35.24	11.14	20.2	ETRTO
285/70R19.5	18	146/144	M	8.25	6175	130	6610	130	35.24	11.14	20.2	ETRTO
285/70R19.5	18	150/148	J	8.25	6945	130	7390	130	35.24	11.14	20.2	ETRTO
275/70R22.5	16	148/145	M	8.25	6390	130	6945	130	37.72	10.87	20.2	ETRTO


# KJT016



- Aggressive zigzag center grooves and open shoulder grooves provide outstanding traction in mud and snow.
- Stone rejectors protect the casing in base of the tread groove.
- Protect ribs on both sidewalls to fight damage from curbing, cuts and abrasions.
- 3D SIPS locks together under compression for the stability of a solid block.
- Strong carcass materials help promote tire durability and provide tire retreadability.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
225/70R19.5	12	125/123	M	6.75	3415	95	3640	95	31.93	8.90	18.9	TRA
225/70R19.5	14	128/126	N	6.75	3750	110	3970	110	31.93	8.90	18.9	TRA

# LFL866



- Extra wide tread design for high mileage and even wear.
- Zig-zag grooves for excellent handling.
- Optimize structure design.



SUITABLE FOR ALL POSITION AXLE OF TRUCKS RUNNING UNDER A WIDE RANGE OF USE, FROM HIGHWAY TO LIGHT UNPAVED ROAD												
Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
205/65R17.5	16	129/127(132/132)	J(G)	6.00	3860	130	4080	130	27.99	8.03	15.7	ETRTO
215/70R17.5	14	123/121	L	6.00	3415	112	3195	112	29.41	8.31	18.3	JATMA
245/70R17.5	18	143/141	J	7.50	5675	127	6005	127	31.06	9.76	18.3	ETRTO
215/75R17.5	14	126/124	M	6.00	3525	102	3750	102	30.20	8.31	18.3	ETRTO
215/75R17.5	16	135/133	J	6.00	4540	123	4805	123	30.20	8.31	18.3	ETRTO
235/75R17.5	14	132/130	M	6.75	4190	112	4400	112	31.38	9.17	18.3	ETRTO
235/75R17.5	16	141/140	J	6.75	5510	123	5675	123	31.38	9.17	18.3	ETRTO
235/75R17.5	18	143/141	J	6.75	5675	127	6005	127	31.38	9.17	18.3	ETRTO
225/80R17.5	14	123/122	L	6.75	3305	102	3415	102	31.69	8.90	20.2	JATMA
225/90R17.5	14	127/125	L	6.75	3640	102	3860	102	33.50	8.90	16.4	JATMA
225/90R17.5	16	128/126	L	6.75	3750	102	3970	102	33.50	8.90	16.4	JATMA

# D905



- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
215/75R17.5	12	124/123	M	6.00	3415	100	3525	100	30.20	8.31	18.9	ETRTO
215/75R17.5	14	126/124	L/M	6.00	3525	102	3750	102	30.20	8.31	18.9	ETRTO
215/75R17.5	16	135/133	J/L	6.00	4540	123	4805	123	30.20	8.31	18.9	ETRTO
235/75R17.5	14	132/130	L/M	6.75	4190	112	4400	112	31.38	9.17	19.5	ETRTO
235/75R17.5	16	141/140	J	6.75	5510	123	5675	123	31.38	9.17	19.5	ETRTO
235/75R17.5	18	143/141	J	6.75	5675	127	6005	127	31.38	9.17	19.5	ETRTO
295/80R22.5	16	152/148	M	9.00	6945	123	7830	123	41.10	11.73	22.0	ETRTO
295/80R22.5	18	152/149	M	9.00	7160	130	7830	130	41.10	11.73	22.0	GB
285/70R19.5	18	146/144	M	8.25	6175	130	6610	130	35.24	11.14	20.2	ETRTO
285/70R19.5	18	150/148	J	8.25	6945	130	7390	130	35.24	11.14	20.2	ETRTO
275/70R22.5	16	148/145	M	8.25	6390	130	6945	130	37.72	10.87	22.0	ETRTO
315/70R22.5	16	154/150	M	9.00	7390	130	8270	130	39.92	12.28	22.0	ETRTO

# F820



SUITABLE FOR ALL POSITION AXLE MEDIUM TRUCKS.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
8.5R17.5	12	121/120	M	6.00	3085	91	3195	91	31.57	8.46	16.4	ETRTO
205/75R17.5	14	124/122	M	6.00	3305	109	3525	109	29.65	8.03	15.7	ETRTO
215/75R17.5	16	135/133	J/L	6.00	4540	123	4805	123	30.20	8.31	15.7	ETRTO
235/75R17.5	16	141/140	L	6.75	5510	123	5675	123	31.38	9.17	16.4	ETRTO
235/75R17.5	18	143/141	J	6.75	5675	127	6005	127	31.38	9.17	16.4	ETRTO
225/70R19.5	12	125/123	M	6.75	3415	95	3640	95	31.93	8.90	15.7	TRA
225/70R19.5	14	128/126	M	6.75	3750	110	3970	110	31.93	8.90	15.7	TRA
245/70R19.5	14	133/131	M	7.50	4300	110	4540	110	33.03	9.76	16.4	TRA
245/70R19.5	14	133/131	M	7.50	4300	109	4540	109	33.03	9.76	16.4	ETRTO
245/70R19.5	16	135/133	M	7.50	4540	120	4805	120	33.03	9.76	16.4	TRA
245/70R19.5	16	136/134	M	7.50	4675	120	4940	120	33.03	9.76	16.4	ETRTO
245/70R19.5	18	141/140	J	7.50	5510	123	5675	123	33.03	9.76	16.4	ETRTO
265/70R19.5	16	139/136	M	7.50	4940	120	5355	120	34.13	10.31	17.0	GB
265/70R19.5	16	140/138	M	7.50	5205	112	5510	112	34.13	10.31	17.0	ETRTO
265/70R19.5	18	143/141	J	7.50	5675	123	6005	123	34.13	10.31	17.0	ETRTO
285/70R19.5	16	144/142	M	8.25	5840	116	6175	116	35.24	11.14	17.6	ETRTO
285/70R19.5	18	146/144	M	8.25	6175	130	6610	130	35.24	11.14	17.6	ETRTO
285/70R19.5	18	150/147	J	8.25	6780	130	7390	130	35.24	11.14	17.6	ETRTO
255/70R22.5	16	140/137	M	7.50	5070	120	5510	120	36.61	10.04	17.6	TRA
255/70R22.5	16	140/137	M	7.50	5070	116	5510	116	36.61	10.04	17.6	ETRTO
275/70R22.5	16	148/145	M	8.25	6390	130	6945	130	37.72	10.87	18.3	ETRTO
275/70R22.5	18	150/148	M	8.25	6945	130	7390	130	37.72	10.87	18.3	ETRTO

LONG HAUL  
REGIONAL  
ON&OFF ROAD  
COACH&URBAN  
WINTER

# D928



- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
11R22.5	14	144/142	L	8.25	5840	105	6175	105	41.69	10.98	25.8	TRA
11R22.5	16	146/143	L	8.25	6005	120	6610	120	41.69	10.98	25.8	TRA
11R22.5	16	148/145	L	8.25	6390	123	6945	123	41.69	10.98	25.8	ETRTO
11R24.5	14	146/143	L	8.25	6005	105	6610	105	43.70	10.98	25.8	TRA
11R24.5	16	149/146	L	8.25	6610	120	7160	120	43.70	10.98	25.8	TRA
295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	40.16	11.73	25.8	TRA
295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	40.16	11.73	25.8	TRA
285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.57	11.14	25.8	TRA
285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.57	11.14	25.8	TRA

# LLF02



- Special design for steer and trailer axle of trucks.
- Good side-wear resistance.
- High-speed performance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
12R22.5	16	152/148	L	9.00	6945	123	7830	123	42.68	11.81	18.3	ETRTO
13R22.5	18	156/150	L	9.75	7390	127	8820	127	44.25	12.60	20.8	ETRTO
295/80R22.5	16	152/148	M	9.00	6945	123	7830	123	41.10	11.73	18.3	ETRTO
295/80R22.5	18	152/149	M	9.00	7160	130	7830	130	41.10	11.73	18.3	GB
295/80R22.5	18	154/149	M	9.00	7160	123	8270	123	41.10	11.73	18.3	ETRTO
315/80R22.5	18	154/150	M	9.00	7390	120	8270	120	42.36	12.28	18.3	ETRTO
315/80R22.5	20	156/150	L	9.00	7390	123	8820	123	42.36	12.28	18.3	ETRTO
315/80R22.5	22	158/150(154/150)	L(M)	9.00	7390	130	9370	130	42.36	12.28	18.3	ETRTO

# LAL800



SUITABLE FOR ALL POSITION AXLE OF TRUCKS RUNNING ON THE MULTI ROAD.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
12.00R24	18	156/153	K	8.5	8050	112	8820	112	48.27	12.32	18.9	ETRTO
12.00R24	20	160/156	K	8.5	8820	123	9915	123	48.27	12.32	18.9	ETRTO
11R22.5	16	146/143	L	8.25	6005	120	6610	120	41.50	10.98	20.2	TRA
11R22.5	16	148/145	L	8.25	6390	123	6945	123	41.34	10.98	20.2	ETRTO
12R22.5	16	152/148	L	9.00	6945	123	7830	123	42.68	11.81	20.2	ETRTO
12R22.5	18	152/149	K	9.00	7160	135	7830	135	42.72	11.81	20.2	GB
315/80R22.5	18	154/150	M	9.00	7390	120	8270	120	42.36	12.28	20.2	ETRTO
315/80R22.5	20	156/150	L	9.00	7390	123	8820	123	42.36	12.28	20.2	ETRTO

# KTA303



- Optimization of the shoulder block improves resistance to shoulder damage
- Lasting grip and stability with stone rejection design
- HAT technology: low heat generation

SUITABLE FOR ALL POSITION AXLE OF TRUCKS RUNNING UNDER A WIDE RANGE OF USE, FROM HIGHWAY TO LIGHT UNPAVED ROAD.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
9.5R17.5	18	143/141	M/J	6.75	5675	127	6005	127	33.15	9.45	14.5	ETRTO
215/75R17.5	14	126/124	L	6.00	3525	102	3750	102	30.20	8.31	15.1	ETRTO
215/75R17.5	16	135/133	J	6.00	4540	123	4805	123	30.20	8.31	15.1	ETRTO
235/75R17.5	18	143/141	J	6.75	5675	127	6005	127	31.38	9.17	15.7	ETRTO
9.00R20	16	144/142	K	7.0	5840	130	6175	130	40.12	10.20	18.3	GB
10.00R20	16	146/143	K	7.5	6005	120	6610	120	41.50	10.94	18.3	GB
10.00R20	18	149/146	K	7.5	6610	135	7160	135	41.50	10.94	18.3	GB
11R22.5	16	148/145	L	8.25	6390	123	6945	123	41.34	10.98	17.6	ETRTO
12R22.5	16	152/148	L	9.00	6945	123	7830	123	42.68	11.81	18.9	ETRTO
12R22.5	18	152/149	L	9.00	7160	135	7830	135	42.72	11.81	18.9	GB
295/80R22.5	16	152/148	M	9.00	6945	123	7830	123	41.10	11.73	17.6	ETRTO
295/80R22.5	18	152/149	L	9.00	7160	130	7830	130	41.10	11.73	17.6	GB
315/80R22.5	20	156/150	L	9.00	7390	123	8820	123	42.36	12.28	17.6	ETRTO
265/70R19.5	18	143/141	J	7.50	5675	123	6005	123	34.13	10.31	15.7	ETRTO
385/65R22.5	20	160	K	11.75	---	---	9915	130	42.20	15.31	20.2	ETRTO

LONG HAUL

REGIONAL

ON&OFF ROAD

COACH&URBAN

WINTER

# KTD303



- Optimization of the shoulder block improves resistance to shoulder damage.
- Lasting grip and stability with M+S.
- HAT technology: low heat generation.

SUITABLE FOR DRIVE AXLE OF TRUCKS RUNNING UNDER A WIDE RANGE OF USE, FROM HIGHWAY TO LIGHT UNPAVED ROAD

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
9.5R17.5	18	143/141	L	6.75	5675	127	6005	127	33.15	9.45	18.3	ETRTO
215/75R17.5	16	135/133	J	6.00	4540	123	4805	123	30.20	8.31	17.6	ETRTO
235/75R17.5	18	143/141	J	6.75	5675	127	6005	127	31.38	9.17	18.3	ETRTO
10.00R20	18	149/146	K	7.5	6610	135	7160	135	41.50	10.94	22.0	GB
295/80R22.5	16	152/148	M	9.00	6945	123	7830	123	41.10	11.73	21.4	ETRTO
295/80R22.5	18	152/149	L	9.00	7160	130	7830	130	41.10	11.73	21.4	GB
295/80R22.5	18	154/149	L	9.00	7160	123	8270	123	41.10	11.73	21.4	ETRTO
315/80R22.5	20	156/150	L	9.00	7390	123	8820	123	42.36	12.28	22.7	ETRTO
265/70R19.5	18	143/141	J	7.50	5675	123	6005	123	34.13	10.31	18.3	ETRTO

# KTT306



- Low fuel consumption
- HAT technology: low heat generation
- Zigzag pattern design
- New technology for tire to reduce the weight

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
11R22.5	16	148/145	L	8.25	6390	123	6945	123	41.34	10.98	17.6	ETRTO

# KTT307



- Low fuel consumption
- HAT technology: low heat generation
- Stone rejection design
- New technology for tire to reduce the weight

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
11R22.5	16	148/145	L	8.25	6390	123	6945	123	41.34	10.98	17.6	ETRTO
11R22.5	18	149/146	K	8.25	6610	135	7160	135	41.34	10.98	17.6	GB
295/80R22.5	18	154/149	L	9.00	7160	123	8270	123	41.10	11.73	17.6	ETRTO

# KTT308



- Low fuel consumption
- HAT technology: low heat generation
- Stone rejection design
- New technology for tire to reduce the weight

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
11R22.5	16	148/145	L	8.25	6390	123	6945	123	41.34	10.98	17.6	ETRTO



LONG HAUL

REGIONAL

ON&OFF ROAD

COACH&URBAN

WINTER




# ON&OFF ROAD

**LMA71**

**LMA72W**



# LMA71

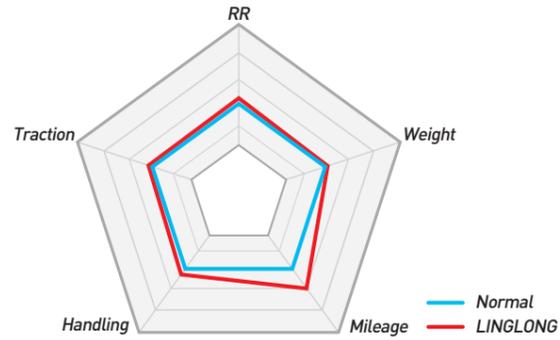


RADIAL TRUCK TIRE

ORIGIN: THAILAND

## SELLING POINTS OF TIRE PRODUCTS

- 1 Durable tread compound and robust shoulder designed for excellent wear resistance
- 2 3-groove pattern combined with zigzag grooves offering outstanding traction and water drainage
- 3 Center lug with diagonal sipes to promote traction in wet or dry conditions for the life of the tread

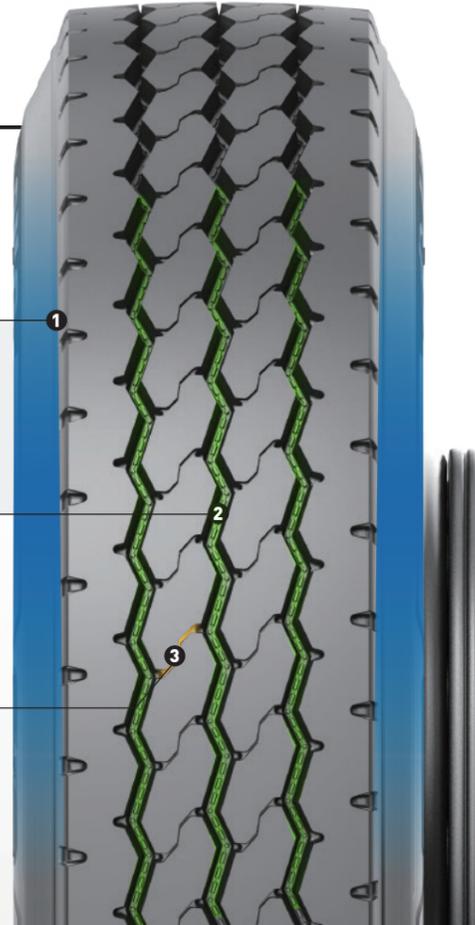

ALL POSITION



Size	Load index & Speed symbols	PR	Load Range	Max load and Max Air (lbs & psi)				Overall Diameter in inches	Section Width in inches	Tread Depth (in 32nds)
				Dual		Single				
				lbs	psi	lbs	psi			
255/70R22.5	140/137M	16	H	5070	120	5510	120	36.54	10.16	17
11R22.5	146/143K	16	H	6005	120	6610	120	41.09	11.06	19
11R24.5	149/146K	16	H	6610	120	7160	120	43.06	11.06	19
315/80R22.5	157/154K	20	L	8270	130	9090	130	42.33	12.60	19



LONG HAUL


REGIONAL

ON&OFF ROAD

COACH&URBAN

WINTER

# LMA72w

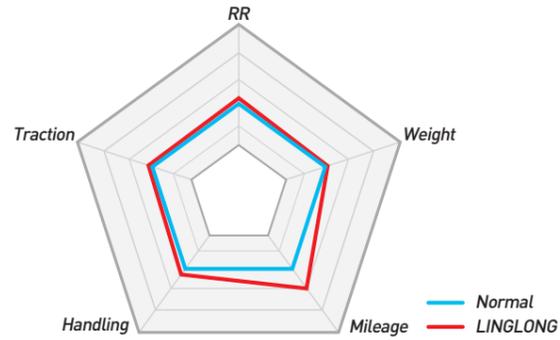

RADIAL TRUCK TIRE

ORIGIN: THAILAND

## SELLING POINTS OF TIRE PRODUCTS

- 1 Open shoulder offers good traction while durable tread compound and robust shoulder block designed for excellent wear resistance.
- 2 Self-cleaning tread pattern provides high traction with stone rejector platforms in every groove for excellent durability.
- 3 Tread compounded and constructed to resist cuts and impacts in mixed service.



WEAR-RESISTANT



TRACTIVE FORCE

ALL POSITION



Size	Load index & Speed symbols	PR	Load Range	Max load and Max Air (lbs & psi)				Overall Diameter in inches	Section Width in inches	Tread Depth (in 32nds)
				Dual		Single				
				lbs	psi	lbs	psi			
385/65R22.5	160K	20	L	---	---	9920	130	42.22	14.96	21

LONG HAUL

REGIONAL

ON&OFF ROAD

COACH&URBAN

WINTER



ON&OFF ROAD

# LLA08

- Typical combined pattern.
- Cut resistance compound.
- Good braking and grip.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
 12.00R24	18	156/153	K	8.5	8050	112	8820	112	48.27	12.32	21.4	ETRTO
 12.00R24	20	160/156	K	8.5	8820	123	9915	123	48.27	12.32	21.4	ETRTO
11R22.5	14	144/142	K	8.25	5840	105	6175	105	41.50	10.98	18.9	TRA
11R22.5	16	146/143	K	8.25	6005	120	6610	120	41.50	10.98	18.9	TRA
11R22.5	16	148/145	K	8.25	6390	123	6945	123	41.50	10.98	18.9	ETRTO
11R22.5	18	149/146	L/K	8.25	6610	135	7160	135	41.50	10.98	18.9	GB
 12R22.5	16	152/148	K	9.00	6945	123	7830	123	42.68	11.81	21.4	ETRTO
12R22.5	18	152/149	K	9.00	7160	135	7830	135	42.72	11.81	21.4	GB
11R24.5	14	146/143	K	8.25	6005	105	6610	105	43.46	10.98	20.8	TRA
11R24.5	16	149/146	K	8.25	6610	120	7160	120	43.46	10.98	20.8	TRA
12R24.5	16	152/149	K	9.00	7160	120	7830	120	44.69	11.81	20.2	TRA
12R24.5	18	154/151	K	9.00	7610	135	8270	135	44.69	11.81	20.2	GB
255/70R22.5	16	140/137	M	7.50	5070	120	5510	120	36.61	10.04	16.0	TRA
295/80R22.5	16	152/148	K	9.00	6945	123	7830	123	41.10	11.73	20.2	ETRTO
295/80R22.5	18	154/149	K	9.00	7160	123	8270	123	41.10	11.73	20.2	ETRTO
 315/80R22.5	18	154/150	M	9.00	7390	120	8270	120	42.36	12.28	22.0	ETRTO
 315/80R22.5	20	156/150	L	9.00	7390	123	8820	123	42.36	12.28	22.0	ETRTO
315/80R22.5	22	158/150	L	9.00	7390	130	9370	130	42.36	12.28	22.0	ETRTO

ON&OFF ROAD

# LD0986

- Off-road pattern block ensures powerful traction and good self-cleaning ability.
- Chip, cut and abrasion resistance tread compound.
- Deep tread depth increases mileage and service life.



SUITABLE FOR HILLY AREA AND MINE ETC. OFF ROAD CONDITIONS

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
12.00R24	20	160/156	F	8.5	8820	123	9915	123	48.27	12.32	32.1	ETRTO
12.00R24	18	156/153	F	8.5	8050	112	8820	112	48.27	12.32	32.1	ETRTO
12.00R24	20	160/157	F	8.5	9095	130	9915	130	48.27	12.40	32.1	GB
12.00R24	18	158/155	F	8.5	8540	120	9370	120	48.27	12.40	32.1	GB
11R22.5	14	144/142	F	8.25	5840	105	6175	105	41.93	10.98	30.9	TRA
11R22.5	16	146/143	F	8.25	6005	120	6610	120	41.93	10.98	30.9	TRA
11R22.5	16	148/145	F	8.25	6390	123	6945	123	41.93	10.98	30.9	ETRTO
12R22.5	16	152/148	F	9.00	6945	123	7830	123	42.68	11.81	30.9	ETRTO
12R22.5	18	152/149	F	9.00	7160	135	7830	135	43.15	11.81	30.9	GB
13R22.5	18	156/150	F	9.75	7390	127	8820	127	44.25	12.60	30.9	ETRTO
11R24.5	14	146/143	F	8.25	6005	105	6610	105	43.94	10.98	30.9	TRA
11R24.5	16	149/146	F	8.25	6610	120	7160	120	43.94	10.98	30.9	TRA
295/80R22.5	16	152/148	F	9.00	6945	123	7830	123	41.10	11.73	30.9	ETRTO
295/80R22.5	18	152/149	F	9.00	7160	130	7830	130	41.34	11.73	30.9	GB
315/80R22.5	18	154/150	F	9.00	7390	120	8270	120	42.36	12.28	30.9	ETRTO
315/80R22.5	20	156/150	F	9.00	7390	123	8820	123	42.36	12.28	30.9	ETRTO

LONG HAUL

REGIONAL

ON&OFF ROAD

COACH&URBAN

WINTER

ON&OFF ROAD

# KMA400



- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- Lasting grip and stability with M+S and 3PMSF marking.

SUITABLE FOR ALL POSITION AXLE OF TRUCKS UNDER ALL KINDS OF WORKING CONDITIONS.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
295/80R22.5	18	152/149	K	9.00	7160	130	7830	130	41.10	11.73	23.9	GB
13R22.5	18	156/150	K	9.75	7390	127	8820	127	4425	12.60	23.9	ETRTO
13R22.5	20	158/156	K	9.75	8820	130	9370	130	4425	12.60	23.9	ETRTO
295/80R22.5	16	152/148	K	9.00	6945	123	7830	123	41.10	11.73	23.9	ETRTO
315/80R22.5	18	154/150	K	9.00	7390	120	8270	120	42.36	12.28	23.9	ETRTO
315/80R22.5	20	156/150	K	9.00	7385	123	8820	123	42.36	12.28	23.9	ETRTO
425/65R22.5	20	165	K	12.25	---	---	7385	120	4425	16.93	23.3	ETRTO
445/65R22.5	20	169	J/K	13.00	---	---	12800	130	45.28	17.87	23.3	ETRTO

# KXA400



- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- Lasting grip and stability with M+S marking.

SUITABLE FOR TRAILER AND STEER AXLE OF TRUCKS UNDER ALL KINDS OF WORKING CONDITIONS.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
385/65R22.5	18	158	L	11.75	---	---	9370	123	42.20	15.31	22.7	ETRTO
385/65R22.5	20	160(158)	K(L)	11.75	---	---	9915	130	42.20	15.31	22.7	ETRTO
385/65R22.5	24	164	J	11.75	---	---	11000	130	42.20	15.31	22.7	ETRTO
425/65R22.5	20	165	K	12.25	---	---	11400	120	44.25	16.61	23.3	ETRTO

ON&OFF ROAD

# KMD401



- Chip, cut and abrasion resistance tread compound.
- Stone rejection design protects groove bottom from stone puncture.
- Deep tread depth increases mileage and service life.

SUITABLE FOR DRIVE AXLE OF TRUCKS UNDER ALL KINDS OF WORKING CONDITIONS.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
11R22.5	16	146/143	L	8.25	6005	120	6610	120	41.50	10.98	25.8	TRA
11R22.5	16	148/145	L	8.25	6390	123	6945	123	41.34	10.98	25.8	ETRTO
11R24.5	16	149/146	L	8.25	6610	120	7160	120	43.46	10.98	28.3	TRA
295/80R22.5	16	152/148	L	9.00	6945	123	7830	123	41.10	11.73	25.8	ETRTO
295/80R22.5	18	152/149	L	9.00	7160	130	7830	130	41.10	11.73	25.8	GB

# LD0986+



- Off-road pattern block ensures powerful traction and good self-cleaning ability.
- Chip, cut and abrasion resistance tread compound.
- Deep tread depth and wide tread width increase mileage and service life.

SUITABLE FOR HILLY AREA AND MINE ETC., OFF ROAD CONDITIONS

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
12.00R20	22	158/155	B	8.5	8540	140	9370	140	44.72	12.40	40.3	CAS
12.00R24	18	158/155	F	8.5	8540	120	9370	120	48.74	12.40	40.3	GB/TRA
12.00R24	20	160/157	F	8.5	9095	130	9915	130	48.74	12.40	40.3	GB
12.00R24	22	162/158	B	8.5	9370	130	10470	130	48.74	12.40	40.3	---

# KMA40



- Chip, cut and abrasion resistance tread compound.
- Stone rejection design protects groove bottom from stone puncture.
- Deep tread depth increases mileage and service life.

SUITABLE FOR ALL POSITION AXLE OF TRUCKS UNDER ALL KINDS OF WORKING CONDITIONS.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
11R22.5	16	146/143	L	8.25	6005	120	6610	120	41.50	10.98	23.1	TRA
11R24.5	16	149/146	L	8.25	6610	120	7160	120	43.46	10.98	23.1	TRA

LONG HAUL

REGIONAL

ON&OFF ROAD

COACH&URBAN

WINTER

## ON&OFF ROAD

# D950



- Drive axle for on/off road conditions.
- Deep and rigid block design for good traction.
- Cut resistance compound.
- Used for logging conditions where high traction required.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
11R22.5	14	144/142	K	8.25	5840	105	6175	105	41.93	10.98	29.0	TRA
11R22.5	16	146/143	K	8.25	6005	120	6610	120	41.93	10.98	29.0	TRA
11R24.5	14	146/143	F/G	8.25	6005	105	6610	105	43.94	10.98	31.4	TRA
11R24.5	16	149/146	F/G	8.25	6610	120	7160	120	43.94	10.98	31.4	TRA
295/75R22.5	16	146/143	J	9.00	6005	120	6610	120	40.39	11.73	29.0	TRA
285/75R24.5	16	147/144	J	8.25	6175	120	6780	120	41.81	11.14	29.0	TRA

# LAR919



- Pattern block design reduces shoulder heat.
- Wide running surface and higher saturation design improve the wear mileage.
- Powerful traction, grip and climbing performance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
11R22.5	16	146/143	J	8.25	6005	120	6610	120	41.50	10.98	23.9	TRA
11R22.5	16	148/145	K	8.25	6390	123	6945	123	41.34	10.98	23.9	ETRTO
325/95R24	22	162/160	K	9.0	9915	123	10470	123	48.35	12.80	22.7	ETRTO

# LLA38



- Typical combined pattern.
- Cut resistance compound.
- Good braking and grip.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
385/55R22.5	18	158	L	12.25	---	---	9370	123	39.21	15.20	20.8	ETRTO
385/55R22.5	20	160	J	12.25	---	---	9915	130	39.21	15.20	20.8	ETRTO
385/65R22.5	18	158	K	11.75	---	---	9370	123	42.20	15.31	20.8	ETRTO
385/65R22.5	20	160	J/K	11.75	---	---	9915	130	42.20	15.31	20.8	ETRTO
385/65R22.5	24	164	J	11.75	---	---	11000	130	42.20	15.31	20.8	ETRTO
425/65R22.5	18	162	K	12.25	---	---	10470	110	44.25	16.61	22.0	TRA
425/65R22.5	20	165	J/K	12.25	---	---	11400	120	44.25	16.61	22.0	ETRTO
445/65R22.5	20	168	J/K	13.00	---	---	12300	120	45.28	17.48	22.7	TRA
445/65R22.5	20	169	J	13.00	---	---	12800	130	45.28	17.48	22.7	ETRTO

## ON&OFF ROAD

# KMA403



- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- HAT technology: low heat generation.

SUITABLE FOR ALL POSITION AXLE OF TRUCKS UNDER ALL KINDS OF WORKING CONDITIONS.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
12.00R24	18	156/153	K	8.5	8050	112	8820	112	48.27	12.32	19.5	ETRTO
12.00R24	20	160/156	K	8.5	8820	123	9915	123	48.27	12.32	19.5	ETRTO
11R22.5	16	148/145	K	8.25	6390	123	6945	123	41.50	10.98	17.6	ETRTO
295/80R22.5	18	154/149	K	9.00	7160	123	8270	123	41.10	11.73	18.9	ETRTO
315/80R22.5	20	156/150	K	9.00	7390	123	8820	123	42.36	12.28	19.5	ETRTO
385/65R22.5	20	160	K	11.75	---	---	9915	130	42.20	15.31	20.2	ETRTO
385/65R22.5	24	164	G	11.75	---	---	11000	130	42.20	15.31	20.2	ETRTO

# KMD403



- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- HAT technology: low heat generation.

SUITABLE FOR DRIVE AXLE OF TRUCKS UNDER ALL KINDS OF WORKING CONDITIONS.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
12.00R24	20	160/156	K	8.5	8820	123	9915	123	48.27	12.32	23.9	ETRTO
295/80R22.5	18	154/149	K	9.00	7160	123	8270	123	41.10	11.73	23.3	ETRTO
295/80R22.5	18	154/149	K	9.00	7160	123	8270	123	41.10	11.73	23.3	ETRTO
315/80R22.5	18	154/150	L	9.00	7390	120	8270	120	42.36	12.28	23.9	ETRTO
315/80R22.5	20	156/150	K	9.00	7390	123	8820	123	42.36	12.28	23.9	ETRTO

# LD0912



- Good traction resistance.
- Chip, cut and abrasion resistance tread compound.
- Deep tread depth increases mileage and service life.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
11R22.5	16	148/145	J	8.25	6390	123	6945	123	41.34	10.98	25.2	ETRTO
275/80R22.5	16	149/146	J	8.25	6610	123	7160	123	39.84	10.87	25.2	ETRTO
295/80R22.5	16	152/148	F	9.00	6945	123	7830	123	41.10	11.73	25.2	ETRTO



# COACH & URBAN

LONG HAUL

REGIONAL

ON&OFF ROAD

COACH&URBAN

WINTER

# LAU609



- Enhanced sidewall ensures high safety.
- Tire strength is increased by 35%, with application of ST steel cord.
- Tire bead cracking is prevented, with application fiber layer in bead area.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
305/70R22.5	20	152/150 (154/150)	J(F)	9.00	7390	130	7830	130	39.37	12.01	26.5	ETRTO
275/70R22.5	16	148/145	J	8.25	6390	130	6945	130	37.72	10.87	26.5	ETRTO
275/70R22.5	16	148/145 (152/148)	J(E)	8.25	6390	130	6945	130	37.72	10.87	26.5	ETRTO
275/70R22.5	18	150/148(152/148)	J(F)	8.25	6945	130	7390	130	37.72	10.87	26.5	ETRTO
11R22.5	16	148/145	J	8.25	6390	123	6945	123	41.34	10.98	26.5	ETRTO
245/70R19.5	12	129/127	J	7.50	4080	95	3860	95	33.03	9.76	20.2	TRA
245/70R19.5	14	133/131	J	7.50	4540	110	4300	110	33.03	9.76	20.2	TRA
245/70R19.5	14	133/131	J	7.50	4540	109	4300	109	33.03	9.76	20.2	ETRTO
245/70R19.5	16	135/133	J	7.50	4805	120	4540	120	33.03	9.76	20.2	TRA
245/70R19.5	16	136/134	J	7.50	4940	120	4675	120	33.03	9.76	20.2	ETRTO



LONG HAUL

REGIONAL

ON&OFF ROAD

COACH&URBAN

WINTER

MAX LOAD AND INFLATED PRESSURE

# WINTER

# LDW807



- High safety and good handling.
- Optimized rib contact combats uneven wear and improves wet handling and braking.
- Long life.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
11R22.5	16	146/143	M	8.25	6005	116	6610	116	41.50	10.98	25.2	JATMA
11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	25.2	TRA
11R22.5	16	148/145	L	8.25	6390	123	6945	123	41.50	10.98	25.2	ETRTO
315/70R22.5	16	154/150	L	9.00	7390	130	8270	130	39.92	12.28	25.2	ETRTO
295/80R22.5	16	152/148	K	9.00	6945	123	7830	123	41.10	11.73	25.2	ETRTO
295/80R22.5	16	150/147	K	9.00	6780	120	7390	120	41.10	11.73	25.2	GB
315/80R22.5	18	154/150	M	9.00	7390	120	8270	120	42.36	12.28	25.2	ETRTO
315/80R22.5	20	156/150	L	9.00	7390	123	8820	123	42.36	12.28	25.2	ETRTO

# LDW808



- High safety and good handling.
- Optimized rib contact combats uneven wear and improves wet handling and braking.
- Long life.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
245/70R17.5	14	134/132	M	7.50	4400	112	4675	112	31.06	9.76	18.9	EIRTO
245/70R17.5	16	136/134	M	7.50	4675	123	4940	123	31.06	9.76	18.9	ETRTO
245/70R17.5	18	143/141	L	7.50	5675	127	6005	127	31.06	9.76	18.9	EIRTO
225/70R19.5	12	125/123	M	6.75	3415	95	3640	95	31.93	8.90	17.0	GB
225/70R19.5	14	128/126	M	6.75	3750	110	3970	110	31.93	8.90	17.0	GB
215/75R17.5	14	126/124	M	6.00	3525	102	3750	102	30.20	8.31	16.4	ETRTO
215/75R17.5	16	135/133	J	6.00	4540	123	4805	123	30.20	8.31	16.4	ETRTO
215/75R17.5	14	125/122	L	6.00	3305	110	3640	110	30.20	8.31	16.4	GB
215/75R17.5	16	127/124	J	6.00	3525	120	3860	120	30.20	8.31	16.4	GB
235/75R17.5	14	132/130	M	6.75	4190	112	4400	112	31.38	9.17	17.6	EIRTO
235/75R17.5	16	141/140	J	6.75	5510	123	5675	123	31.38	9.17	17.6	ETRTO
235/75R17.5	18	143/141	J	6.75	5675	127	6005	127	31.38	9.17	17.6	ETRTO
235/75R17.5	14	129/126	L	6.75	3750	110	4080	110	31.38	9.17	17.6	GB
235/75R17.5	16	132/129	J	6.75	4080	120	4400	120	31.38	9.17	17.6	GB

# LFW806



- High safety and good handling.
- Optimized rib contact combats uneven wear and improves wet handling and braking.
- Low noise.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
11R22.5	16	146/143	M	8.25	6005	116	6610	116	41.50	10.98	18.9	JATMA
11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	18.9	TRA
11R22.5	16	148/145	L	8.25	6390	123	6945	123	41.50	10.98	18.9	ETRTO
11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.46	10.98	18.9	TRA
11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.46	10.98	18.9	TRA
385/65R22.5	20	160(158)	J(L)	11.75	---	---	9915	130	42.20	15.31	20.8	ETRTO
275/70R22.5	16	148/145	M	8.25	6390	130	6945	130	37.72	10.87	18.9	ETRTO
275/70R22.5	16	144/141	M	8.25	5675	120	6175	120	37.72	10.87	18.9	GB
315/70R22.5	16	154/150	L	9.00	7390	130	8270	130	39.92	12.28	18.9	ETRTO
295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	40.39	11.73	18.9	TRA
295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	40.39	11.73	18.9	TRA
295/80R22.5	16	152/148	K	9.00	6945	123	7830	123	41.10	11.73	18.9	ETRTO
295/80R22.5	16	150/147	K	9.00	6780	120	7390	120	41.10	11.73	18.9	GB
315/80R22.5	18	154/150	M	9.00	7390	120	8270	120	42.36	12.28	18.9	ETRTO
315/80R22.5	20	156/150(154/150)	L/M	9.00	7390	123	8820	123	42.36	12.28	18.9	ETRTO

LONG HAUL

REGIONAL

ON&OFF ROAD

COACH&URBAN

WINTER

WINTER

# KWD600



- Lasting grip and stability with M+S and 3PMSF marking.
- Optimized rib contact combats uneven wear and improves wet handling and braking.

SUITABLE FOR DRIVE AXLE OF TRUCKS UNDER SNOW CONDITION.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
295/80R22.5	16	152/148	M	9.00	6945	123	7830	123	41.10	11.73	25.8	ETRTO
315/70R22.5	16	154/150(152/148)	L(M)	9.00	7390	130	8270	130	39.92	12.28	25.2	ETRTO
315/70R22.5	18	156/150(154/150)	L(M)	9.00	7390	130	8820	130	39.92	12.28	25.2	ETRTO
315/80R22.5	18	154/150	M	9.00	7390	120	8270	120	42.36	12.28	27.7	ETRTO
315/80R22.5	20	156/150(154/150)	L/M	9.00	7390	123	8820	123	42.36	12.28	27.7	ETRTO

# KWT600



- For trailer axle of trucks under snow condition use only.
- Lasting grip and stability with M+S and 3PMSF marking.
- Optimized rib contact combats uneven wear and improves wet handling and braking.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
385/55R22.5	18	158	L	12.25	---	---	9365	123	39.21	15.20	18.3	ETRTO
385/55R22.5	20	160(158)	K(L)	12.25	---	---	9915	130	39.21	15.20	18.3	ETRTO
385/65R22.5	20	160(158)	K(L)	11.75	---	---	9920	130	42.20	15.31	19.5	ETRTO
385/65R22.5	24	164(158)	K(L)	11.75	---	---	11000	130	42.20	15.31	19.5	ETRTO

WINTER

# KWD601



- High safety and good handling.
- Optimized rib contact combats uneven wear and improves wet handling and braking.
- Long life.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
245/70R19.5	12	129/127	M	7.50	4080	95	3860	95	33.03	9.76	18.3	TRA
245/70R19.5	14	133/131	M	7.50	4540	110	4300	110	33.03	9.76	18.3	TRA
245/70R19.5	14	133/131	M	7.50	4540	109	4300	109	33.03	9.76	18.3	ETRTO
245/70R19.5	16	135/133	M	7.50	4805	120	4540	120	33.03	9.76	18.3	TRA
245/70R19.5	16	136/134	M	7.50	4940	120	4675	120	33.03	9.76	18.3	ETRTO

# KWD700



- 3D Kerf technology provides excellent traction and long original tread life.
- Wide tread design and combined structure of rib and block pattern provides stability, longer mileage, and better handling performance in all weather conditions.
- Long life, low rolling resistance.
- Optimizes the footprint for even wear and long tread life.
- Strong carcass materials help promote tire durability and provide tire retreadability.

LONG HAUL APPLICATION DRIVE

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and inflated pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Dual		Single					
					lbs	psi	lbs	psi				
11R22.5	16	146/143	L	8.25	6005	120	6610	120	41.93	10.98	27.1	TRA
11R24.5	16	149/146	L	8.25	6610	120	7160	120	43.94	10.98	27.1	TRA

LONG HAUL

REGIONAL

ON&OFF ROAD

COACH&URBAN

WINTER

## TRUCK AND BUS TIRES REPLACEMENT LIMITED WARRANTY

### Warranty Eligibility

This limited warranty applies to all the qualified replacement market Truck and Bus Tires produced by Shandong Linglong Tyre Co., Ltd. and all its subsidiaries. This Limited Warranty only applies to the original purchaser, and the tire has a complete brand identification, DOT or barcode . and it is valid if all of the following apply:

- The tires are manufactured after January 1, 2025, and are shipped to North America for sale and use.
- The tire fails due to the workmanship or materials.
- The tire shall not exceed the warranty period, and the remaining pattern shall not be less than TWI.

### What is warranted and for how long

- The warranty period is 6 years from the date of tire production, and the remaining pattern depth is not less than TWI .
- If the tire fails due to manufacturing reasons and meets the warranty scope and conditions, the remaining pattern exceeds TWI, the new tire of the same specification will be covered free of charge.

### What is not warranted

- 1.Road hazard injuries or damages caused by obstacles or debris, such as cuts, punctures (whether repairable or not), snags, bruises, tears, abrasions or impact breaks.
- 2.Improper repairs or repairs that have failed.
- 3.Improper inflation or other maintenance abuses.
- 4.Improper mounting/dismounting.
- 5.Mechanical irregularities such as bent wheel assemblies, misalignment worn or faulty components.
- 6.Accident, corrosion, tire alteration, vandalism, fire, theft or damages cause by nature.
- 7.Damage from overinflation or under-inflation, overloading, defective vehicle mechanical conditions.
- 8.Non-racing or off-road tires that are misused or abused for racing or off-road purposes.
- 9.Ozone or weather cracking or other abuse, misuse, tire alteration, run flat.
- 10.Tire which D.O.T identification number and/or brand name removed intentionally.
- 11.Tires that have been modified after leaving the factory , such as fillers, sealants, balancing substances and external tire treatments or materials of any kind. If the added material is the cause of a failure, a tire will not be accepted for warranty claim.
- 12.Abnormal tread wear resulting from improper installation, wheel misalignment, tire/wheel assembly imbalance, etc.
- 13.Vehicles or tires operated in excess of the rated Work Capacity Factor.
- 14.Additional monetary loss, such as damage of the vehicle or time, etc.

### CASING WARRANTY

We offer retreading guarantees for Truck and Bus Tires. if the tires cannot be retreaded due to the manufacturer's own reasons, a subsidy will be provided. This renovation rule applies only to the United States and Canada.

LINGLONG brand offer a 6-year warranty with 2 retreads; Some specified patterns offer a 8-year warranty with 4 retreads; The specific details of the specified patterns are as follows.

Brand	Warranty	Specified tire patterns
LINGLONG	Warranty period for retreading is 6 years ,and can be retreaded 2 times.	LLD71
	For the specified tire patterns, retreading warranty period is 8 years, and can be retreaded 4 times.	LLT71

### To make a claim under this limited warranty

- 1.Present your tires and the original purchase receipt to point of purchase or any the Company' s dealer.
- 2.Complete and sign the Claim Adjustment form provided, keep a copy for your records and leave the tire with the dealer to process the warranty claim.

### Owner' s obligation

- 1.At the time of purchase, tires must be properly installed with recommended inflation and balanced. Observe rotation and alignment regularly according to recommendations.
- 2.Refer to any authorized the Company' s dealer or point of purchase for adjustment claim.
- 3.Owner is responsible for service charges and applicable taxes.
- 4.Submit a copy of the original purchase receipt to support the adjustment claim.

### Exclusions, Limitations, and Legal Rights

No representative or dealer is authorized to make any representation, promise, or agreement on behalf of Linglong, except as expressly stated in this document. Any tire, regardless of construction quality, may fail in service or otherwise become unserviceable due to conditions beyond the manufacturer's control. This warranty does not constitute a representation that tire failure will not occur under any circumstances.

**DISCLAIMER:** This warranty is provided in lieu of all other warranties and representations, express or implied. Linglong expressly disclaims any and all implied warranties, including but not limited to the implied warranties of merchantability and fitness for a particular purpose. No other warranty or representation of any kind shall be deemed to exist or arise by operation of law.

**LIMITATION OF DAMAGES:** Under no circumstances shall Linglong be liable for any indirect, special, incidental, consequential, or punitive damages, including but not limited to loss of profits, business interruption, loss of reputation or goodwill, or costs related to replacement transportation or other associated expenses. Certain states or provinces do not allow the exclusion or limitation of incidental or consequential damages; therefore, some portions of this limitation may not be enforceable in specific jurisdictions.

This warranty sets forth specific legal obligations, and additional rights may apply depending on the governing state or provincial law.